


Dashboard control of PRM3

eGauge meter Dashboard Control

[Back to Main Power Relay Module \(PRM3\) Product Page.](#)

A "Switch" can be toggled to control the relay when connected to the eGauge via USB by using the [Mobile-Friendly dashboard interface](#).

1. From the classic interface, click View -> Mobile Friendly.
2. Use the 3-dot menu, click View -> Dashboard to load the Dashboard interface.
3. [Edit the dashboard](#) to add a new dashlet.
4. Choose "Switch":

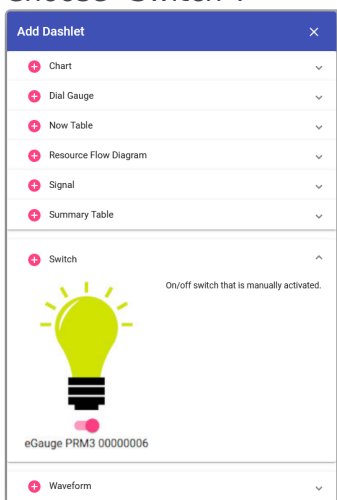

5. Exit the editing mode on the dashboard and click the newly added dashlet to configure it.
6. Click the drop-down for "Relay to control" and choose the PRM3, which relays the switch should control and the icon. Split-phase loads with a single hot and neutral will use 1 relay inputs, single-phase loads with 2 hots will use 2 relay inputs, and three-phase loads will use all 3 relay inputs.

Edit switch

Relay to control
eGauge PRM3 00000102

activate:

RELAY 1

☒

RELAY 2

☐

RELAY 3

☐

On icon/Off icon *

☒ / ☐

Optional title
%M %m %n

Cancel

OK

7. The selected relay(s) can now be toggled by clicking the slider button under the icon:



Please visit kb.egauge.net for the most up-to-date documentation.