



InHand Networks



With 3G/4G, Wi-Fi and Link Backup

InRouter615-S Series

Industrial LTE Router

The InRouter615-S (also IR615-S) is a series of IoT router that supports 3G/4G, Wi-Fi and VPN. It provides easy network access for field devices with 3G/4G wireless WAN and Wi-Fi wireless LAN support, helps to build device networks scaling from tens up to tens of thousands.

With embedded hardware & software watchdogs and multi-layer link detection mechanism, the router safeguards stable and highly-reliable communications for field sites, especially unattended sites. It also supports InHand DeviceManager to facilitate remote network management.


Multiple VPN encryption technologies can ensure secure data transmission, preventing malicious data access and tampering. The user-friendly WEB interface drastically reduces the difficulty of network configuration.

With easy network access, ease of use, and remote management functions, the router provides reliable high-speed data channel for things in the true sense of IoT.

Applicable to a wide range of applications, including large-scale networking:

- Express parcel cabinet
- Branch networking, Commercial networking
- Public utility: heating station, gas valve room, water treatment
- Security surveillance and criminal investigation
- Smart transportation
- Smart grid
- Smart manufacturing, Photovoltaic energy
- Industrial automation, etc.

Application Case

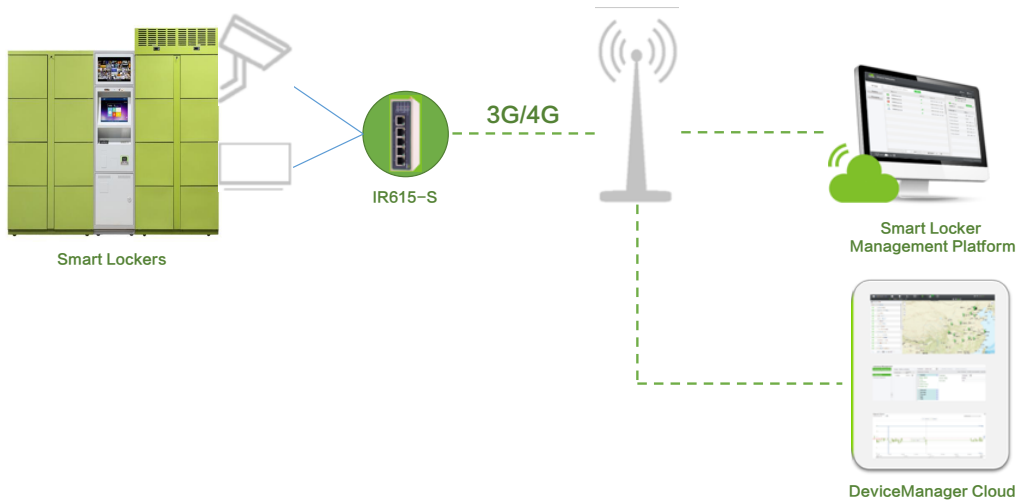

Features and Advantages

- + Supports 4G LTE CAT4 high-speed network, as well LTE CAT1 and CAT-M low-rate networks
 - + Supports WLAN
 - + 5 Ethernet ports
 - + Multiple VPN functions
 - + Multiple built-in link redundancies ensure uninterrupted communications
 - + Supports SNMP and InHand DeviceManager cloud platform, for efficient central network management
 - + User experience plan, enjoy efficient and convenient service
 - + Supports high-efficiency deployment of large-scale device networks
 - + Compact sized, easy to fit
 - + Industrial-grade, ready for challenging conditions
- **Uninterrupted Internet access**
Supports multiple fast LTE WAN networks. Gets device connected through the global covering 3G/4G network regardless of where the device is located. Three LTE network types to choose: LTE CAT4 (150/50Mbps down/uplink), CAT1 (10/5Mbps down/uplink), and CAT-M (375/300Kbps down/uplink).

Supports Wi-Fi, both AP & STA modes, to set up secure wireless networks easily. Support 3G/4G and Wi-Fi mutual-backup, further ensuring uninterrupted transmission by providing redundant communication links.
 - **Strong security protection**
Transmission security: supports IPsec VPN, L2TP, PPTP, OPEN VPN, GRE, and CA certificate.

Network protection: supports SPI stateful detection, Secure Shell (SSH), intrusion protection (forbidden ping), DDoS defense, attack defense, IP-MAC binding, etc. to protect against external attacks

Access security: supports user hierarchical authorization, implements secure access management by giving different roles different permissions.
 - **High reliability and stability**
Link layer detection: detects link conditions, auto redial when dropped off to maintain link connection.

PPP layer detection: maintains connection to carrier network side, prevents forced hibernation, and keep network link smooth.

VPN tunnel detection: maintains stable connection of VPN tunnels and continuous data transmission.


Device fault self-recovery: embedded hardware watchdog, self-recovers from malfunctions, maintaining high device availability.
 - **Link redundancy design**
Have a variety of link redundancy designs to ensure uninterrupted field communication

Support 3G/4G, Wi-Fi and wired backup

Dual SIM card design can support network switching between different operators

VRRP hot backup function to realize link backup between multiple routers
 - **Network management cloud platform for central management and deployment**
Supports InHand DeviceManager (DM) cloud platform to facilitate remote monitoring and central management of large-scale device networks. Batch configures large numbers of devices, improve network deployment and maintenance efficiency. Add user experience plan, enjoy efficient and convenient service.
 - **Industrial-grade design**
Metal housing, IP30 protection rating. Reach level 3 on EMC indexes. Ethernet port supports 1.5KV isolation protection. Wide operating temperature: -20°C~70°C. Wide voltage input: DC9-36V.

Dimensions (mm)

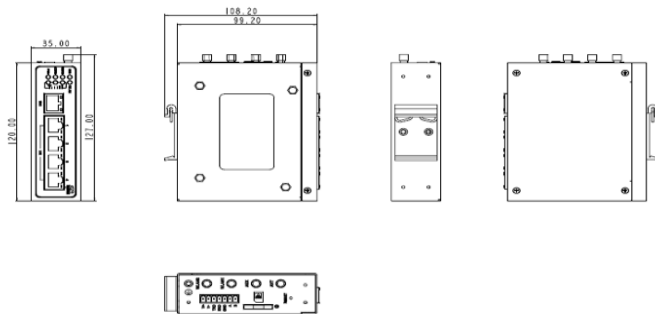

DIN-Rail mounting diagram. Please refer to "Quick Installation Guide" for wall/lug mounting diagram.

7-PIN Industrial Terminal Interface Definition

No.	Definition	Description
1	V+	Positive electrode
2	V-	Negative electrode
3	TXD	Serial RS232 sending
4	RXD	Serial RS232 receiving
5	GND	Serial RS232 signal ground
6	A	Serial RS485 +
7	B	Serial RS485-

Product Specifications

InRouter615-S Hardware Specifications			
Interface			
Ethernet Port	1*10/100Mbps fast Ethernet WAN port 4*10/100Mbps fast Ethernet LAN ports 1.5KV network isolation protection		
Power Supply	DC9-26V, 36V expandable		
Industrial Serial Port	RS-232/485 x 1 ESD protection: 15KV		
SIM Card	Drawer-type card slot x 1 Part models: Drawer-type card slot x 2		
Reset	Pinhole reset button		
Antenna Connector	3G/4G: SMA x 2 WLAN: RP-SMA x 2		
Ground Terminal	Has ground terminal		
Mechanical Specs			
Dimensions (mm)	127x108.2x35mm	Weight (g)	440g
Installation Method	DIN-Rail Optional: Lugs/wall mounting	Protection Rating	IP30
Housing	Metal housing	Cooling	Fanless
Power Rate			
Working Power	150mA-320mA@12V	Standby Power	120mA-200mA@12V
Peak Power	320mA@12V		
Wi-Fi Transmit Power			
Transmit Power	802.11b:16dBm+/-2dBm(11Mbps) 802.11g:16dBm+/-2dBm(54Mbps) 802.11n@2.4GHz:16dBm+/-2dBm(HT20MCS7) 802.11n@2.4GHz:16dBm+/-2dBm(HT40MCS7)		
Ambient Environment			
Storage Temperature	-40 ~ 85°C	Operating Temperature	-20 ~ 70°C
Ambient Humidity	5 ~ 95% (non-condensing)		
Indicator			
LED	POWER, STATUS, WARN, ERROR, WLAN, LINK, signal indicator		
EMC Index			
Static	EN61000-4-2, level 3	Radiation Electric Field	EN61000-4-3, level 3
Pulsed Electric Field	EN61000-4-4, level 3	Surge	EN61000-4-5, level 3
Conducted Disturbance Immunity	EN61000-4-6, level 3	Shock Wave Resistance	EN61000-4-12, level 3
Power Frequency Magnetic Field Resistance	EN61000-4-8, horizontal / vertical 400A/m (>level 3)		
Physical Specs			
Shockproof	IEC60068-2-27	Vibration Resistance	IEC60068-2-6
Free Fall	IEC60068-2-32		
Certification			
CE, FCC, PTCRB, IC, IMDA, RCM, Class I Division 2, Verizon, AT&T, Sprint, E-Mark, JATE/TELEC			

InRouter615-S Software Specifications			
Network Connection			
Network Access	APN, VPDN	Access Authentication	CHAP/PAP authentication
LAN Protocol	ARP, Ethernet	WAN Protocol	Static IP, DHCP, PPPoE, PPP
Network Type	GSM/GPRS/EDGE, UMTS/HSPA+/EVDO/TD-SCDMA, TDD LTE/FDD LTE		
IP Application	Ping, Trace, DHCP Server, DHCP Relay, DHCP Client, DNS relay, DDNS, Telnet		
IP Routing	Static routing	NAT	Support network address translation
Network Security			
Firewall	Stateful Packet Inspection (SPI), DoS attack defense; Multicast filter/Ping packet, Access Control List (ACL); Content URL filter, port mapping, virtual IP mapping, IP/MAC binding		
Access Security	Multi-level user authorization		
Data Security	IPsec VPN /L2TP/PPTP/GRE/OPEN VPN/CA digital certificate		
Reliability			
Backup	Dual-SIM mutual backup, VRRP hot backup, link backup		
Link detection	Send heartbeat packets, auto redial when disconnected		
Embedded Watchdog	Device operation self-detection, auto recover from malfunctions		
WLAN (Optional)			
Protocol & Standard	IEEE 802.11b/g/n	Transmission Rate	Up to 300Mbps
Working Mode	AP and STA modes		
Security	Open system, shared key, WPA/WPA2 certification WEP/TKIP/AES encryption		
Transmission Distance	100m (actual transmission distance depends on site environment)		
Intelligence			
Integrated DTU Functions	TCP, UDP transparent transmission mode, TCP Server mode; Supports conversion of Modbus RTU to Modbus TCP bridge; Supports DCUDP, DCTCP mode; Supports for up to 15 data centers		
Network Management			
QoS Management	Supports bandwidth limit, IP speed limit		
Configuration Method	Telnet, web, ssh and console	Upgrade Method	Web, Device Manager
Restart	Support immediate restart, planned restart		
Logs	Local system logs, remote logs, and serial export of logs. Power down saving of important logs.		
SMS Functions	Status query, configuration, restart	Dial-on-demand	Dial-on-demand, data / SMS activation
Platform Management	Supports InHand DeviceManager, batch management Add user experience plan, enjoy efficient and convenient service.		
Network Management	SNMP v1/v2c/v3, supports SNMP TRAP Support NTP		
Traffic Management	Supports data traffic threshold setting, supports traffic statistics and traffic alarm		
Alarms	System restart alarm, LAN port online/offline alarm, data traffic alarm, SIM card failure alarm, etc.		
Maintenance Tools	Ping, route tracking, network speed test		
Status Query	System status, modem status, network connection status, and routing status		

Ordering Guide

Model code: IR615-S-<WMNN>-<WLAN/NA>-<DS/NA>				
Model	<WMNN>: Cellular Type & Module U-UMTS(HSPA), L-LTE single mode, L3-LTE triple-mode, L5-LTE 5-mode, L7-LTE 7-mode	<WLAN/NA>: WLAN	<DS/NA>: Dual SIM	
IR615-S-U/(PS08/30108)-<WLAN/NA>-<DS/NA>	(Global) UMTS(HSPA+) Band 1/2/5/8 (850/900/1900/2100MHz) EDGE/GPRS/GSM 850/900/1800/1900	WLAN: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM	
IR615-S-L5/(TH09/60218)-<WLAN/NA>-<DS/NA>	(For China, LTE CAT4) LTE-FDD Band 1/3/5/8 LTE-TDD Band 38/39/40/41 HSPA+/UMTS 1/5/8/9 EDGE/GPRS/GSM 900/1800MHz	WLAN: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM	
IR615-S-L7/(TL01/60522)-<WLAN/NA>-<DS/NA>	(For China, LTE CAT4) LTE-FDD Band 1/3/5/8 LTE-TDD Band 34/38/39/40/41 TD-SCDMA Band 34/39 WCDMA Band 1/8 CDMA/EVDO BC0 GSM Band 3/8	WLAN: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM	
IR615-S-L3/(FH20/60220)-<WLAN/NA>-<DS/NA>	(For Europe, Asia & Pacific area, LTE CAT4) LTE-FDD Band 1/2/3/5/7/8/20 UMTS(DC-HSPA+) Band 1/2/5/8 EDGE/GPRS/GSM 850/900/1800/1900MHz	WLAN: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM	
IR615-S-FQ38-<WLAN/NA>	(For North America, Verizon Wireless, LTE CAT4) LTE-FDD Band 2/4/5/12/13/14/66/71 UMTS(HSPA+) Band 2/4/5	WLAN: Wi-Fi <NA>: no Wi-Fi	Single SIM	
IR615-S-FQ78-<WLAN/NA>	(For Australia & South America, LTE CAT4) LTE-FDD CAT4 Band 1/2/3/4/5/7/8/28 LTE-TDD Band 40 WCDMA Band 1/2/5/8 GSM Band 2/3/5/8	WLAN: Wi-Fi <NA>: no Wi-Fi	Dual SIM in default	
IR615-S-FQ88-<WLAN/NA>	(For Japan, LTE CAT4) LTE FDD Band 1/3/8/18/19/26 LTE TDD Band 41 WCDMA Band 1/6/8/19	WLAN: Wi-Fi <NA>: no Wi-Fi	Dual SIM in default	
IR615-S-FB02-<WLAN/NA>	(Global) LTE CATM/NB Band 1/2/3/4/5/8/12/13/ 17/18/19/20/25/26/28 (and band 39 in M1-only)	WLAN: Wi-Fi <NA>: no Wi-Fi	Single SIM	
IR615-S-FB13-<WLAN/NA>	(For North America, AT&T, T-Mobile, LTE CAT1) LTE-FDD CAT1 Band 2/4/12	WLAN: Wi-Fi <NA>: no Wi-Fi	Dual SIM in default	
IR615-S-FB23-<WLAN/NA>	(For North America, Verizon Wireless, LTE CAT1) LTE-FDD CAT1 Band 4/13	WLAN: Wi-Fi <NA>: no Wi-Fi	Dual SIM in default	
IR615-S-FB53-<WLAN/NA>-<DS/NA>	(For Europe, LTE CAT1) LTE-FDD CAT1 Band 3/7/20 EDGE/GPRS/GSM 900/1800MHz	WLAN: Wi-Fi <NA>: no Wi-Fi	<DS>: dual SIM <NA>: single SIM	
IR615-S-FB63-<WLAN/NA>	(For APAC, LTE CAT1) LTE-FDD CAT1 Band 3/8/28 UMTS(DC-HSPA+) 2100	WLAN: Wi-Fi <NA>: no Wi-Fi	Single SIM	
IR615-S-FS18-<WLAN/NA>	(For North America, AT&T, LTE CAT3) LTE-FDD Band 2/4/5/17 UMTS(HSPA+) Band 2/4/5 EDGE/GPRS/GSM 850/900/1800/1900MHz	WLAN: Wi-Fi <NA>: no Wi-Fi	Single SIM	
IR615-S-FS39-<WLAN/NA>	(For North America, Verizon Wireless, AT&T, T-Mobile, LTE CAT6) LTE-FDD Band 2/4/5/12/13/29 UMTS(HSPA+) Band 2/4/5 EDGE/GPRS/GSM 850/900/1800/1900MHz	WLAN: Wi-Fi <NA>: no Wi-Fi	Dual SIM in default	
IR615-S-EN00-<WLAN/NA>	No cellular module	WLAN: Wi-Fi <NA>: no Wi-Fi	Single SIM	
Example:	IR615-S-FS39-WLAN: Five Ethernet ports IR615-S series cellular router, supports IPsec/PPTP/L2TP/OPEN VPN, 4G LTE CAT 6, supports Wi-Fi AP&STA modes, one serial port with RS232 and RS485 mode			

About Us

InHand Networks is a global leader of Industrial IoT, with a record of tremendous success following groundbreaking innovation since our inception in 2001.

InHand serves world-class partners and customers with industrial M2M routers, gateways, industrial Ethernet switches, rugged computers and IoT management platforms. We provide IoT solutions for various vertical markets including Smart Grid, Industrial Automation, Remote Machine Monitoring, Smart Vending, Smart City, Retail and more.

Proudly bearing the marks of both Rockwell Automation Encompass Product Partner in Asia-Pacific and Schneider Electric CAPP Technology Partner, InHand Networks defines industrial innovation and reliability.



3900 Jermantown Rd., Suite 150, Fairfax, VA 22030 USA
T: +1 (703) 348-2988
E: info@inhandnetworks.com
www.inhandnetworks.com